

07-03-00

4

Attorney Docket No.: LANT-001

IN THE UNITED STATES PATENT AND TRADEMARK OFFICEPatent Application

I hereby certify that this transmittal of the below described documents is being deposited with the United States Postal Service in an envelope bearing Express Mail Postage and an Express Mail label, with the below serial number, addressed to the Commissioner of Patents and Trademarks, Washington, D.C., 20231, on the below date of deposit.			
Express Mail Label No.:	EK860116060US	Name of Person Making the Deposit:	Anthony Chou
Date of Deposit:	6/30/00	Signature of the Person Making the Deposit:	<i>Anthony Chou</i>

Inventor(s): Nader Vijeh and Adisak Mekittikul

Title: GUARANTEED QUALITY OF SERVICE IN AN ASYNCHRONOUS METRO PACKET TRANSPORT RING

The Commissioner of Patents and Trademarks
 Washington, D.C. 20231
 Sir:

Transmittal of a Patent Application
 (Under 37 CFR §1.53)

Transmitted herewith is the above identified patent application, including:

- ☒ Specification, claims and abstract, totaling 33 pages.
☐ Formal drawings, totaling _____ pages.
☒ Informal drawings, totaling 6 pages.
☐ Declaration and Power of Attorney.
☐ Information Disclosure statement.
☐ Form 1449
☒ Assignment(s)
☒ Assignment Recordation Form (duplicate)
☐ Preliminary Amendment

FEES DUE

The fees due for filing the specification pursuant to 37 C.F.R. § 1.16 and for recording of the Assignment, if any, are determined as follows:

CLAIMS					
	NO. OF CLAIMS		EXTRA CLAIMS	RATE	FEES
Basic Application Fee					\$690.00
Total Claims	29	Minus 20=	9	X \$18 =	\$162.00
Independent Claims	4	Minus 3=	1	X \$78=	\$78.00
If multiple dependent claims are presented, add \$260.00					\$0.00
Add Assignment Recording Fee of \$40.00 If Assignment document is enclosed					\$40.00
TOTAL APPLICATION FEE DUE					\$970.00

PAYMENT OF FEES

The full fee due in connection with this communication is provided as follows:

1. Not enclosed
 - ☐ No filing fee is to be paid at this time.
2. Enclosed
 - ☒ Filing fee
 - ☒ Recording assignment
 - ☐ Petition fee for filing by other than all the inventors or person on behalf of the inventor where inventor refused to sign or cannot be reached
 - ☐ For processing an application with specification in a non-English language
 - ☐ Processing and retention fee
 - ☐ Fee for international-type search report
 - ☒ The Commissioner is hereby authorized to charge any additional fees associated with this communication or credit any overpayment to Deposit Account No.: 23-0085. A duplicate copy of this authorization is enclosed.
 - ☒ A check in the amount of \$970.00
 - ☐ Charge any fees required or credit any overpayments associated with this filing to Deposit Account No.: 23-0085.

This application is filed pursuant to 37 C.F.R. § 1.53 in the name of the above-identified Inventor(s).


Please direct all correspondence concerning the above-identified application to the following address:

WAGNER, MURABITO & HAO LLP
Two North Market Street, Third Floor
San Jose, California 95113
(408) 938-9060

- ☒ This transmittal ends with this page.

Respectfully submitted,

Date: 6/30/00

By: 
Name: James P. Hao
Reg. No. .36,398

LANT-001

Patent

UNITED STATES PATENT APPLICATION

for

GUARANTEED QUALITY OF SERVICE IN AN ASYNCHRONOUS
METRO PACKET TRANSPORT RING

Inventors:

Nader Vijeh

Adisak Mekkittikul

prepared by:

WAGNER, MURABITO & HAO
Two North Market Street
Third Floor
San Jose, CA 95113
(408) 938-9060

CONFIDENTIAL

GUARANTEED QUALITY OF SERVICE IN AN ASYNCHRONOUS METRO PACKET TRANSPORT RING

FIELD OF THE INVENTION

5

The present invention relates to an apparatus and method for guaranteed quality of service in an asynchronous metro packet transport ring.

BACKGROUND OF THE INVENTION

10

The Internet is a general purpose, public computer network which allows millions of computers all over the world, hooked into the Internet, to communicate and exchange digital data with other computers also coupled to the Internet. Once a computer is coupled to the Internet, a wide variety of options become available. Some of the myriad functions possible over the Internet include sending and receiving electronic mail (e-mail) messages, browsing different web sites, downloading and/or uploading files, etc. In the past, activities over the Internet were limited due to the relatively slow connection speeds of dial-up modems over conventional telephone lines. However, as new technologies emerge, the speed at which one can connect onto the Internet is ever increasing. Now, users on the Internet have the bandwidth to participate in live discussions in chat rooms, play games in real-time, watch streaming video, listen to music, shop and trade on-line, etc. In the future, it is imagined that the bandwidth will be such that video-on-

CONFIDENTIAL

demand, HDTV, IP telephony, video teleconferencing, and other types of bandwidth intensive applications will soon be possible.

Indeed, telecommunications companies are now laying the foundation to dramatically increase the bandwidth of the Internet backbone. Significant upgrades are being made to the routing, networking, and cabling infrastructure to keep up with the explosion in Internet traffic. One approach by which bandwidth is being increased relates to fiber optics technology. By sending pulses of light through glass fibers no thicker than a human hair, vast amounts of digital data can be transmitted at extremely high speeds. And with the advent of dense wavelength division multiplexing, different wavelengths of light can be channeled over the same, single fiber strand, thereby increasing its capacity several fold.

However, there is a problem with distributing the bandwidth of this new fiber optic network to end users. Essentially, this next-generation information superhighway has no real, effective entrance or exit ramps. Presently, service providers are using traditional local area network (LAN) switches and routers manufactured by companies such as Cisco, Nortel, and Lucent to perform the function of packet routing. Digital data is packetized; when a packet is transmitted by a user, that packet is examined and routed to its destination according to its IP address contained within that packet.

Although this process is standard and well-accepted, it suffers from several drawbacks. Namely, packets are transmitted asynchronously and

sent best effort through the Internet. Due to traffic congestion, network overhead, routing conditions, and other uncontrollable external factors, this process is highly unreliable and unpredictable. Basically, packets vie for available bandwidth and are routed according to a best-effort delivery model.

- 5 As such, the reliability of traditional LAN switches and routers is limited. Consequently, it is virtually impossible to provide any kind of quality of service (QoS) using traditional LAN switches and routers. QoS refers to the guarantee of providing timely delivery of information, controlling bandwidth per user, and setting priorities for select traffic. For real-time applications
- 10 such as video on demand, HDTV, voice communications, etc., dropped packets or late-arriving packets can seriously disrupt or even destroy performance. And for many Internet Service Providers (ISP's), Applications Service Providers (ASP's), web sites/portals, and businesses, it is of paramount importance that they have the ability to provide a certain
- 15 minimum threshold bandwidth. For example, a e-commerce or business web site may lose critical revenue from lost sales due to customers not being able to access their site during peak hours.

- Because QoS is so highly desired by users, there exists mechanisms
- 20 which have been developed to provide QoS functionality. However, these mechanisms are all extremely expensive to implement. One mechanism is commonly referred to as T-carrier services (e.g., T1 line for carrying data at 1.544 Mbits/sec. and T3 line for carrying data at a much faster rate of 274.176 Mbits/sec.). These T1 and T3 lines are dedicated point-to-point data links
- 25 leased out by the telephone companies. The telephone companies typically

charge long distance rates (e.g., \$1,500-\$20,000 per month) for leasing out a plain old T1 line. Another commonly used mechanism for achieving QoS relates to Synchronous Optical Network (SONET). As with T-carrier services, SONET uses time division multiplexing (TDM) to assign individual channels to pre-determined time slots. With TDM, each channel is guaranteed its own specific time slot in which it can transmit its data. Although TDM enables QoS, it is costly to implement because both the transmitter and receiver must be synchronized at all times. The circuits and overhead associated with maintaining this precise synchronization is costly. Furthermore, TDM based networking technologies are highly inefficient in that if a user does not transmit data within his dedicated time slot, that time slot goes empty and is wasted. In other words, TDM employs a use-it-or-lose-it approach whereby unused bandwidth is totally wasted; unused bandwidth cannot be reallocated to a different user.

15

Although the Internet backbone is being substantially overhauled to substantially increase its bandwidth, there is no mechanism in place today for distributing this bandwidth to end users that is cost-efficient, effective and yet which also has the ability of providing QoS. The present invention provides a solution to this networking need.

20

SUMMARY OF THE INVENTION

The present invention pertains to a metropolitan packet transport ring (MPTR). The MPTR is comprised of a fiber optic loop through which
5 packetized data flow asynchronously in one direction. Because the packetized data flows asynchronously through the fiber optic loop, the present invention eliminates the need to maintain a strict synchronization scheme, implement expensive synchronization circuits, and incur the processing overhead associated with traditional TDM mechanisms. In
10 another embodiment, data flows asynchronously through two separate fiber optic loops. Data flows clockwise through one loop and counter-clockwise through the second loop.

Coupled to this fiber optic loop are a number of metropolitan packet
15 switches (MPS's). An MPS allows packetized data from an upstream MPS to flow through downstream. The MPS also puts packetized data onto and pulls packetized data off of the fiber optic loop. Thereby, computing and networking devices such as personal computers, servers, modems, set-top boxes, routers, etc., can access the fiber optic loop via the MPS's.

20

It is also the responsibility of the MPS to separately regulate the data rates of packetized data being fed onto the fiber loop. This enables the MPS to provide quality of service (QoS) to certain subscribers. The MPS monitors the traffic flowing in its particular segment of the network. If its segment
25 becomes overly congested, the MPS reduces the data rates corresponding to

CONFIDENTIAL

flows of upstream MPS's. The data rates of the QoS flows are left intact, which guarantees that those paying subscribers can maintain a constant bit rate service, a variable bit rate service with a minimum floor bandwidth, or a service level agreement. Thereby, the present invention guarantees QoS in an asynchronous packetized data environment on a per-flow basis.

Furthermore, if bandwidth does become available due to a temporary lull in traffic, the unused bandwidth can be allocated by the MPS. The MPS transmits control packets to upstream MPS's informing them that they can increase their data rates on selected flows according to some pre-specified weighting scheme. This ensures that the total bandwidth of the MPTR is utilized as efficiently as possible with minimal wasted bandwidth.

In one embodiment, a ring management system (RMS) is used to perform the initial bandwidth allocation.

In one embodiment of the present invention, the data rate can be adjusted on a per-flow basis. A device, user, or port can have multiple flows. QoS can be provided on a per-flow basis, and bandwidth can be allocated on a per-flow basis.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention is illustrated by way of example, and not by way of limitation, in the figures of the accompanying drawings and in which like
5 reference numerals refer to similar elements and in which:

Figure 1 shows the overall architecture of the asynchronous metro packet transport ring network according to the currently preferred
10 embodiment of the present invention.

Figure 2 shows an exemplary Metro Packet Transport Ring.

Figure 3 shows the block diagram of the currently preferred
15 embodiment of an MPS.

Figure 4 is a flowchart describing the process by which bandwidth is
managed in an MPTR.

Figure 5 shows an exemplary flow diagram for an MPTR.
20

Figure 6 shows an exemplary computer system which can perform the functions of an RMS.

DETAILED DESCRIPTION

An asynchronous metro packet transport ring network is described. In the following description, for purposes of explanation, numerous specific
5 details are set forth in order to provide a thorough understanding of the present invention. It will be obvious, however, to one skilled in the art that the present invention may be practiced without these specific details. In other instances, well-known structures and devices are shown in block diagram form in order to avoid obscuring the present invention.

10

Figure 1 shows the overall architecture of the asynchronous metro packet transport ring network according to the currently preferred embodiment of the present invention. A metropolitan packet transport ring (MPTR) consists of a loop which is laid to transmit data packets in a
15 metropolitan area network (MAN). A MAN is a backbone network which spans a geographical metropolitan area. Typically, telephone companies, cable companies, and other telecommunications providers supply MAN services to other companies, businesses, and users who need access to networks spanning public rights-of-way in metropolitan areas. In the
20 currently preferred embodiment, the loops consist of installed fiber optic cables. Other less efficient transmission mediums such as hybrid fiber coax, coax cables, copper wiring, or even wireless (radio frequency or over-the-air laser beams) can be used or substituted in part thereof.

Users coupled to a particular MPTR can transmit and receive packetized data to/from each other through that MPTR. For example, a personal computer coupled to MPTR1 can transmit and received data packets to/from a server also coupled to MPTR1. Furthermore, data packets

5 originating from one MPTR can be routed to another MPTR by means of a router or other networking devices. For example, a computer coupled to MPTR1 can transmit data packets over its fiber ring to a terra-bit router 101 to MPTR2. The data packets can then be sent to its final destination (e.g., a computer coupled to MPTR2) through the fiber ring associated with MPTR2.

10 It should be noted that the MPTR rings can be of various sizes and configurations. Although the currently preferred embodiment contemplates the use of a ring, the present invention can also utilize other types of topologies. The MPTRs can also be coupled onto the Internet backbone via a router. For example, MPTR1 can be coupled to a dense wavelength division

15 multiplexed (DWDM) fiber backbone 102 by means of router 101. Thereby, users coupled to MPTR1 has access to the resources available on traditional Internet 103. Note that the present invention can be used in conjunction with traditional Internet schemes employing standard routers, switches, and other LAN equipment 104-107. And any number of MPTR's can thusly be coupled

20 together to gracefully and cost-effectively scale to meet the most stringent networking demands which may arise. And as one particular loop becomes overloaded, a second, third, forth, etc. MPTR may be added to accommodate the increased load. These MPTR's can be coupled to the same router (e.g., MPTR5, MPTR6, and MPTR7) or may alternatively be coupled to different

25 routers.

Not only does the present architecture scale gracefully, it also offers great flexibility. In one embodiment, an MPTR can be used to support one or more LANs. For instance, MPTR6 may support traffic flowing to/from LAN 108. Optionally, it is conceivable that an MPTR may be coupled directly to another MPTR. In this manner, data flowing in MPTR8 can be directly exchanged with data packets flowing through MPTR7. Alternatively, a single MPTR can have multiple entries/exits. For example, MPTR5 is coupled to both router 109 as well as router/switch 110. Thereby, users on MPTR5 have the ability to transmit and receive data packets through either of the two routers 109 or 110. Virtually any configuration, protocol, medium, and topology is made possible with the present MPTR invention.

The implementation and functionality of an MPTR is now described. Referring to Figure 2, an exemplary Metro Packet Transport Ring 200 is shown. It can be seen that MPTR 200 is comprised of two fiber cable loops 201 and 202; a number of Metro Packet Switches (MPS1-MPSn); and a Ring Management System (RMS) 203. The physical layer of an MPTR is actually comprised of two redundant fiber cable loops 201 and 202. Data packets flow in opposite directions through the two loops (e.g., clockwise in loop 201 and counter-clockwise in loop 202). Dispersed along the fiber loops 201 and 202 are a number of Metro Packet Switches (MPS's). An MPS is coupled to both of the fiber loops 201 and 202, providing redundancy to the network. Thereby, if there is a break in one segment of the fiber loop, data can be redirected through one of the MPS's to flow through the other, operational

fiber loop. Alternatively, traffic can be re-directed to minimize localized congestion occurring in either of the loops.

In the currently preferred embodiment, each MPTR can support up to 254 MPS's. An MPS is a piece of equipment which can be housed in specially designed environmental structures or it can be located in wiring closets or it can reside at a place of business, etc. The distances between MPS's can be variable. It is through an MPS that each individual end user gains access to the fiber loops 201 and 202. Each individual end user transmits packetized data onto the MPS first. The MPS then schedules how that packetized data is put on the fiber loop. Likewise, packetized data are first pulled off a fiber loop by the MPS before being sent to the recipient end user coupled to the MPS. In the currently preferred embodiment, a single MPS can support up to 128 end users. An end user can be added to an MPS by inserting a line interface card into that particular MPS. The line interface cards provide I/O ports through which data can be transferred between the MPS and its end users. Different line interface cards are designed in order to meet the particular protocol corresponding to that particular end user. Some of the protocols supported include T1, T3, SONET, Asynchronous Transfer Mode (ATM), digital subscriber line (DSL), Ethernet, etc. It should be noted that line interface cards can be designed to meet the specifications of future protocols. In this manner, end users such as mainframe computers, workstations, servers, personal computers, set-top boxes, terminals, digital appliances, TV consoles, routers, switches, hubs, and other

computing/processing devices, can gain access to either of the fiber loops 201 and 202 through an MPS.

Not only does an MPS provide I/O ports to end users, but an MPS also
5 provides a means for inputting packetized data into the MPTR and also for outputting packetized data out from the MPTR. For example, data packets are input to MPTR 200 via MPS 204 which is coupled to router 205. Similarly, data packets are output from MPTR 200 via MPS 204 to router 205.

10 Another function of an MPS entails passing along incoming data packets originating from an upstream MPS to the next downstream MPS. An MPS receives upstream data packets forwarded from an upstream MPS via an input fiber port coupled to the fiber loop. Data packets received from the fiber loop are examined by that MPS. If the data packet is destined for an end
15 user coupled to that particular MPS, the data packet is routed to the appropriate I/O port. Otherwise, the MPS immediately forwards that data packet to the next downstream MPS as quickly as possible. The data packet is output from the MPS by an output fiber port onto the fiber loop. It should be noted that such pass-through packets flowing from an upstream fiber loop
20 segment, through the MPS, and onto a downstream fiber loop segment, always takes priority over packets waiting to be inserted onto the fiber loop by the MPS. In other words, the MPS puts data packets generated by its end users only as bandwidth permits.

00000000 27250950

An example is now offered to show how data packets flow in an MPTR. With reference to Figure 2, a computer 207 coupled to MPS4 can transmit and receive data to/from the Internet as follows. Data packets generated by the computer are first transmitted to MPS4 via a line coupled to a line interface card residing within MPS4. These data packets are then sent
5 on to MPS3 by MPS4 via loop segment 206. MPS3 examines the data packets and passes the data packets downstream to MPS2 via loop segment 207; MPS2 examines the data packets and passes the data packets downstream to MPS1 via loop segment 208. Based on the addresses contained in the data
10 packets, MPS1 knows to output theses data packets on to the I/O port corresponding to router 205. It can be seen that MPS1 is connected to a router 205. Router 205 routes data packets to/from MPTR 200, other MPTR's, and the Internet backbone. In this case, the data packets are then routed over the Internet to their final destination. Similarly, data packets from the Internet
15 are routed by router 205 to MPTR 200 via MPS1. The incoming data packets are then examined and forwarded from MPS1 to MPS2 via loop segment 209; examined and forwarded from MPS2 to MPS3 via loop segment 210; and examined and forwarded from MPS3 to MPS4 via loop segment 211. MPS4 examines these data packets and determines that they are destined for
20 computer 207, whereby MPS4 outputs the data packets through its I/O port corresponding to computer 207.

Likewise, users coupled to any of the MPS's can transmit and receive packets from any other MPS on the same MPTR without having to leave the
25 loop. For instance, a user on MPS2 can transmit data packets to a user on

MPS4 by first transmitting the packets into MPS2; sending the packets from MPS2 to MPS3 over loop segment 207; MPS3 sending the packets to MPS4 over loop 202; and MPS4 outputting them on the appropriate port corresponding to the intended recipient.

5

Although different protocols are supported by the present invention, the currently preferred embodiment utilizes a single protocol from origination to its final destination. Since most computers have adopted Ethernet network interface cards, the present invention transmits Ethernet data packets through as much of the networking scheme as possible. For example, a computer transmits Ethernet packets to its MPS. These Ethernet packets are carried through the fiber loop which consists of 10 Gbit Ethernet physical layer. Each loop can have a circumference of up to 150 kilometers. The MPTR is connected to an external router by means of one or more 10 Gbit Ethernet lines (e.g., fiber cable). The external router is connected to one or more DWDM Gigabit Ethernet fiber cables which is connected at the other end to another router. This other router is connected to a destination MPTR via another 10 Gbit Ethernet line. The MPTR has 10 Gbit Ethernet loops. The Ethernet packets are then sent through the loop to its intended destination as Ethernet. As such, data originates as Ethernet packets, are routed through the various physical mediums as Ethernet packets, and are received by the recipient as Ethernet. With the present invention, there is no need to convert data to different formats or protocols and then subsequently reconvert the data back. Because the present invention saves on the associated processing overhead, data can be sent faster and more economically.

Figure 3 shows the block diagram of the currently preferred embodiment of an MPS. The MPS is comprised of a number of input port modules 301-308 and output port modules 309-317 coupled to an application specific integrated circuit (ASIC) 318. An input port module accepts a number of incoming flows and classifies each flow per classifier circuit 320. Each flow has its own buffer (e.g., buffers 321-324) for queuing the data associated with each flow. Each buffer has an associated rate controller which varies the rate of the flow coming out from that particular buffer. The rate is controlled on a per-flow basis. After rate control, the data output from each of the buffers are then collectively stored in another buffer 325 which is used to perform the functions of rate shaping and queuing. The data is then eventually output from buffer 325 to either of the two fiber loops 326 or 327. Buffer 328 is used to collate all the data originating from the input modules 301-308. An inserter 330 inserts the data output from buffer 328 with the upstream data on segment 332. Consequently, flows from the input port modules 301-308 are inserted and sent downstream on fiber loop 326. Likewise, buffer 329 collates all the data output from the input modules 301-308. Inserter 331 inserts the data from buffer 329 with the upstream data on segment 333. Consequently, flows from the input port modules 301-308 are inserted and sent downstream on fiber loop 327.

The MPS examines each data packet incoming on fiber loops 326 and 327. If a particular data packet is destined to one of the output ports associated with the MPS, then that data packet is pulled out from the fiber

loop. Removal circuit 334 removes appropriate data packets from fiber loop 327, and removal circuit 335 removes appropriate data packets from fiber loop 326. Buffer 336 sends the data packets pulled from the fiber loops 326 and 327 to the appropriate output port modules 309-317. Once an output
5 module accepts a data packet, that data packet is queued in one of the buffers 337-340. Data packets are output from the data output modules on a per-flow basis.

In the currently preferred embodiment, the traffic flowing into, out of,
10 and through an MPTR is managed collectively by all the MPS's of that particular MPTR. Basically, an MPS provides QoS for those specific users coupled to the MPTR desiring QoS services. Thereby, the present invention can guarantee constant bit rate services, variable bit rate services with a minimal floor bandwidth, as well as tailored service level agreements. The
15 MPS's also aggressively allocate unused bandwidth amongst active flows on the MPTR according to a weighted allocation scheme. Thereby, the entire bandwidth of the MPTR is efficiently utilized at all times.

The way by which QoS is achieved by an MPS is now described. In the
20 present invention, data packets are transmitted and received over the MPTR asynchronously. In other words, users transmit and receive data packets without being synchronized with their counterparts. This means that the present invention eliminates the need for implementing expensive timing circuits and adhering to strict synchronization schedules. Instead of using
25 synchronization or TDM to achieve QoS, the present invention provides QoS

by regulating which packets from an MPS are allowed onto a loop and regulating the rate at which these packets are allowed to be put onto a loop. Once data packets are put on the loop, they are sent through the loop at maximum speed. Given that a loop has a maximum bandwidth, users are

5 prioritized according to their QoS level such that the packets from users with higher priority get put on the loop ahead of other users' packets. Suppose that there is one user who pays for a higher level of service. The MPS is programmed by the RMS to give higher priority to that specific user. Thereby, all packets transmitted by that particular user are immediately put

10 onto the loop and sent on their way. If the loop happens to be congested at that particular instant, packets from other users are temporarily stored in a small buffer and transmitted at a later time, as bandwidth permits. In other words, lower priority packets are temporarily held up by the MPS to be transmitted at a later time as bandwidth becomes available.

15

Furthermore, because data packets are transmitted asynchronously through the MPTR, unused bandwidth can be allocated to active users. In a TDM scheme, time slots are reserved for specific users. If a particular time slot is not used because its user is not active at that particular instant in time,

20 the time slot is wasted. In contrast, the present invention allocates virtually the entire bandwidth of a loop to existing, active users. When a flow stops transmitting/receiving data packets, the amount of bandwidth available over the loop increases. This available bandwidth can be assigned to other flows which are currently active on that loop by the MPS. The MPS constantly

25 monitors the congestion on its loop segment and assigns unused bandwidth

to be allocated amongst active upstream flows according to a pre-specified weighted scheme. Thereby, with the present invention, the entire bandwidth for each of the loops is most efficiently utilized all the time.

5 Figure 4 is a flowchart describing the process by which bandwidth is managed in an MPTR. A loop has a known, fixed maximum bandwidth capacity (BW_{\max}). In the present invention, the RMS initially sets up the routing tables for each flow of each of the MPS's on the MPTR, step 401. The routing tables specify flow criteria, especially the QoS parameters for each
10 flow. For instance, a flow can have a specific minimum bandwidth or a constant bandwidth or a best-effort bandwidth, etc. The RMS also ensures that the bandwidth allocated does not exceed the maximum bandwidth capacity of the MPTR. Before a new flow is allowed to be added onto the MPTR, the RMS checks its tables to determine whether there is enough
15 bandwidth on the MPTR to support the new flow. If there is enough bandwidth, the MPS corresponding to that flow has its table updated to reflect that new flow. However, if there is a possibility that the maximum bandwidth capacity might be exceeded, then the new flow is prevented from being added, and a warning message is displayed.

20

Once all the routing tables have been configured, the traffic on each segment of the MPTR is continuously monitored, step 402. The congestion (BW_T) for a segment is calculated by summing all the upstream transmissions flowing through that particular segment. The congestion for any segment is
25 continuously changing, depending on the flow activities. As the congestion

varies over time, a determination is made as to whether the congestion is increasing or decreasing per step 403. If the congestion is decreasing, the extra bandwidth that becomes available is allocated to upstream flows, step 404. If there is enough bandwidth to meet all active flows needs, then the flows are allowed to access the loop at their maximum transmission rates. There may be circumstances whereby all active flows have reached their maximum rate of transmission and yet not consume all the available bandwidth on a loop segment. Otherwise, the available bandwidth is allocated according to some pre-specified weighting scheme on a per-flow basis.

But if it is determined that the congestion (BW_T) is actually increasing, a determination is made as to whether the congestion (BW_T) is approaching that segment's maximum bandwidth capacity (BW_{max}), step 405. If the maximum bandwidth capacity is not about to be exceeded, then all active flows contributing to the traffic flowing through that particular segment is permitted to transmit at their current rate. However, if the congestion starts to approach the maximum bandwidth capacity (e.g., comes within three or four percent), then the bandwidth for all flows contributing to the traffic through that particular segment is allocated as follows. Those flows having QoS take priority over all other flows, step 406. Accordingly, the QoS flows are guaranteed to have their paid-for portion of the bandwidth. This means that the available bandwidth of upstream flows must be deallocated, step 407. The available bandwidth of flows upstream to the point of congestion is deallocated to a degree such that all QoS users having traffic which flows

through that segment are guaranteed their subscribed level of service and the total congestion through that segment does not exceed a certain percentage of the maximum bandwidth capacity. The available bandwidth for upstream flows are deallocated according to a pre-specified weighting function. It should be noted, that there may be instances where some flows will have dropped packets in order to guarantee the bandwidth requirements of QoS subscribers.

Figure 5 shows an exemplary flow diagram for an MPTR. A number of MPS's 501-506 are shown coupled to a fiber loop 507. Two of the MPS's 502 and 503 have been shown in greater detail to depict how data flows in an MPTR. A number of computers 508-510 are shown coupled to MPS 502. Each of these computers 508-510 has a corresponding buffer 531-535. These buffers 531-535 are used to temporarily store incoming data packets from their respective computers 508-510. In the currently preferred embodiment, there is one buffer for each flow. A single device (e.g., personal computer, server, modem, set-top box, terminal, etc.) can have multiple flows. A flow can be an application corresponding to a device. As such a single device can have multiple flows. For example, computer 510 can have three flows 533-535. Associated with each of these buffers 531-535 is a respective controller 544-548 which controls when packets queued in that particular buffer are allowed to be transmitted onto the loop 507. Once a packet is allowed to be transmitted out from MPS 502, it is inserted into an inserter 525 and added with the other outbound packets for that cycle. And when a packet is conveyed from an MPS onto loop 507, that packet is transmitted to its

destination at the maximum rate of loop 507 and immediately forwarded through intermediary MPS's (if any).

The present invention has the capability to control the data rates on a per-flow basis. For instance, suppose that the flow associated with buffer 533 is that of an e-mail application; the flow associated with buffer 534 is a web browser application; and the flow associated with buffer 535 is an HDTV application. The data rates for each of these three flows can be set by the RMS 517 and regulated separately by adjusting their respective controllers 546-548. The e-mail flow may have a best-effort rate because e-mail is generally not time critical. The browser flow may have a minimum bandwidth rate for web surfing purposes. And the HDTV flow may have a constant bit rate for downloading and viewing streaming videos on demand. By having the ability to control the data rates for each individual flow, the present invention enables great flexibility to meet the demands across all spectrums of usage.

To illustrate how QoS service is provided by the present invention, assume that the user on computer 508 pays for a QoS level which guarantees him a minimum bandwidth of 100 MHz. Now, suppose that the traffic from MPS's 501, 502, 503, and 504 are such that loop segment 518 becomes heavily congested. The MPS 505 immediately recognizes that loop segment 518 is congested because it knows the data rates of each port on each of the MPS's 501-504 transmitting over loop 507. If the sum of the rates generated by each port of MPS's 501-504 starts to approach the maximum bandwidth capacity of

loop segment 518, then MPS 505 instructs one or more of the flows other than the one corresponding to computer 508 to slow down their data rates. For example, MPS 505 can send control packets to MPS 504 to decrease the data rates of the flows associated with computers 519-521. The data rates
5 associated with other ports are decreased until enough bandwidth becomes available so that the computer 508 can transmit at 100 MHz. Conversely, once the flow associated with computer 508 ends its transmission, that additional bandwidth becomes available, and other flows can take measures to increase their data rates accordingly. In this example, MPS 505 may choose
10 to restore the data rates associated with computers 519-521.

In the interim during which a computer transmits data packets faster than its MPS is allowed to put those data packets onto the loop, data packets are temporarily stored in a buffer within its MPS. In the above example, the
15 data rates associated with computers 519-520 were decreased. Suppose that the effect of these data rate reductions is that computers 519-520 generate packets faster than those packets are now allowed to be put on loop 507 (in order to guarantee the QoS of upstream computer 508). The extra data packets are stored in their respective buffers 522-524. Subsequently, when
20 bandwidth becomes available, the data rates at which MPS 504 can transmit data packets associated with computers 519-521 onto loop 507 is increased. The data packets are pulled from the buffers 522-524 for transmission onto loop 507. In some rare cases, buffers may overflow which results in packet loss. It should be noted that, technically, all data packets are first buffered in
25 the first-in-first-out (FIFO) buffers before being put on the loop.

The RMS is basically a computer system coupled to one of the MPS's which has software processes for setting up the data rates for each of the flows of each of the MPS's on that particular MPTR. It should be noted that
5 each MPS has memory for storing a set of tables which contain information regarding the degree of service for each of the flows. For instance, when a new flow is desired to access the MPTR, the RMS first determines whether there is enough bandwidth to support adding that new flow. The RMS then writes to the tables of each of the MPS's informing them of the criteria (e.g.,
10 QoS) for that new flow.

It is also the function of the RMS to provide network administration and to set up the flows for an MPTR. Figure 6 shows an exemplary computer system which can perform the functions of an RMS. An MPS 601 is coupled
15 to a segment of the loop 602. The RMS computer system 603 is coupled to MPS 601 via I/O device 604. RMS computer system 603 also contains a block of memory 605 and a processor 606. Memory 605 is used to store network data (e.g., network configuration, QoS settings, historical information, etc.). In addition, software programs pertaining to the functions of the RMS, as
20 described above, are loaded into and stored upon memory 605. The software programs residing in memory 605 cause a network administration process 607 and a flow setup process 608 to run on processor 606. It should be noted that processor 606 may consist of one or more digital signal processors, application specific integrated circuits, microprocessors, etc. The function of
25 the network administration process 607 is to monitor the performance of the

network. RMS 600 receives status packets from each of the MPS's via MPS 601. This performance data is rendered out for display on display screen 605. The network administrator has the ability to adjust the QoS of each user on an individual basis by entering commands through a keyboard/mouse input device 610. Thereby, a user can be guaranteed constant bit rate, variable bit rate service with a minimal bandwidth, or a service level agreement.

Once the flows have been set up, if there is additional bandwidth which becomes available, then the extra unused bandwidth is allocated according to a pre-determined weighting scheme by the MPS's. It should be noted that there exist a number of different ways by which bandwidth can be allocated. Some bandwidth allocation schemes include weighted fair queue, per-flow queue, deficit round robin, etc. A novel weighted fair virtual queuing scheme is described in the patent application entitled, "A Method And System For Weighted Fair Flow Control In An Asynchronous Metro Packet Transport Ring Network", filed on ???, serial number _____, assigned to the assignee of the present invention, which is incorporated in its entirety herein.

In conclusion, the present MPTR invention described above was designed from the ground up with the intention of carrying packetized data as efficiently as possible, whereas prior art networking schemes were primarily designed to carry voice traffic but were subsequently adapted to carry data. It should be noted that the foregoing descriptions of specific embodiments of the present invention have been presented for purposes of

5 devices, testing/measurement equipment, etc.) can be added to the MPTR and other software processes can be programmed to run on the MPTR. The embodiments described above were chosen in order to best explain the principles of the invention and its practical application, to thereby enable others skilled in the art to best utilize the invention and various embodiments with various modifications as are suited to the particular use are
10 contemplated. It is intended that the scope of the invention be defined by the Claims appended hereto and their equivalents.

CLAIMS

What is claimed is:

1. A metropolitan area packet ring, comprising:
a fiber optic loop carrying asynchronous data packets, wherein the asynchronous data packets flow in one direction through the fiber optic loop;
a plurality of metropolitan packet switches coupled to the fiber optic loop, wherein a metropolitan packet switch is comprised of:
an I/O port coupled to the fiber optic loop which inserts packets of data onto the fiber optic loop and which pulls packets of data off the fiber optic loop;
a processor coupled to the I/O port which separately regulates data packets transmitted over the fiber optic loop, wherein quality of service is guaranteed.
2. The metropolitan area packet ring of Claim 1, wherein bandwidth is allocated on a per-flow basis.
3. The metropolitan area packet ring of Claim 1, wherein the processor decreases a data rate of a flow upstream to a point of congestion in order to guarantee quality of service.
4. The metropolitan area packet ring of Claim 1, wherein bandwidth that becomes available is allocated amongst a plurality of flows.

5. The metropolitan area packet ring of Claim 4, wherein the metropolitan packet switch allocates available bandwidth according to a pre-determined weighting scheme.

6. The metropolitan area packet ring of Claim 1 further comprising a ring management system coupled to one of the metropolitan packet switches which sets up the metropolitan packet switches in order to guarantee pre-determined quality of service on a per-flow basis.

7. The metropolitan area packet ring of Claim 1, wherein the quality of service includes a variable bit rate with a minimum bandwidth.

8. The metropolitan area packet ring of Claim 1, wherein the quality of service includes a constant bit rate with a minimum delay.

9. The metropolitan area packet ring of Claim 1, wherein the metropolitan packet switch performs rate shaping.

10. The metropolitan area packet ring of Claim 1, wherein the data packets transmitted through the fiber loop comprise 10 gigabit Ethernet.

11. In a metropolitan area packet ring having a plurality of switching devices through which a plurality of devices are coupled to the metropolitan area packet ring, a method for managing packetized traffic

flowing asynchronously through the metropolitan area packet ring to guarantee a particular quality of service for a subscriber, comprising the steps of:

assigning the particular quality of service to the subscriber;
controlling asynchronous data packets being transmitted over the metropolitan area packet ring, wherein the subscriber is always guaranteed to have the minimum bandwidth regardless of the congestion on the metropolitan area packet ring.

12. The method of Claim 11 further comprising the step of controlling the asynchronous data packets on a per-flow basis.

13. The method of Claim 11 further including the steps of:
determining packetized data congestion corresponding to particular segments of the metropolitan area packet ring;
adjusting a data rate upstream to a point of congestion in order to guarantee that the minimum bandwidth assigned to the subscriber is being met.

14. The method of Claim 11 further comprising the step of allocating bandwidth that becomes available to subscribers according to a pre-determined weighting scheme.

15. The method of Claim 11, wherein the packetized data flowing through the fiber optic loop is comprised of Ethernet packets.

16. The method of Claim 15, wherein the fiber optic loop is comprised of 10 Gbit Ethernet.

17. The method of Claim 11, wherein the quality of service corresponds to either a variable bit rate with a minimum bandwidth or a constant bit rate with a minimum delay.

18. A device for routing packetized data in a packet ring, comprising:
a first port used to insert data packets onto the packet ring;
a second port used to take data packets off from the packet ring;
a processor coupled to the first port which regulates data packets flowing asynchronously through the packet ring, wherein bandwidth which becomes available is re-allocated.

19. The device of Claim 18, wherein data rates are controlled on a per-flow basis.

20. The device of Claim 18, wherein the processor adjusts the data rates such that quality of service is guaranteed.

21. The device of Claim 18, wherein the processor controls a rate by which data packets belonging to upstream flows are allowed to be inserted onto the packet ring.

22. The device of Claim 18 further comprising a circuit which allocates available bandwidth on a per-flow basis.

23. The device of Claim 18, wherein the data rates of upstream flows are increased according to a pre-determined weighting scheme.

24. The device of Claim 18, wherein the packet ring is comprised of a fiber loop.

25. In a packet ring having a plurality of switching devices coupled to the packet ring, a method to manage packetized traffic flowing asynchronously through the packet ring, comprising the steps of:

assigning initial bandwidths corresponding to a plurality of subscribers;

determining packetized data congestion in the metropolitan area packet ring, wherein if bandwidth becomes available, the available bandwidth is allocated to be used by the subscribers.

25. The method of Claim 25, further comprising the step of allocating bandwidth on a per-flow basis.

26. The method of Claim 25 further comprising the step of allocating the available bandwidth to flows according to a pre-determined weighting scheme.

27. The method of Claim 25 further comprising the step of controlling rates by which packetized data is allowed to be inserted onto the packet ring in order to provide quality of service for a set of the subscribers.

28. The method of Claim 27 further comprising the step of reducing a data rate of an upstream flow to guarantee that the quality of service is maintained for a subscriber.

29. The method of Claim 25, wherein the packet ring comprises a fiber optic loop and the packetized data is comprised of Ethernet packets.

ABSTRACT OF THE DISCLOSURE

An asynchronous metropolitan packet transport ring having guaranteed QoS. Asynchronous packetized data flow in one direction through a fiber optic loop. A number of Metropolitan Packet Switches (MPS) are coupled to the fiber optic loop. An MPS allows packetized data from an upstream MPS to flow to a downstream MPS over a segment of the fiber optic loop. The MPS also puts packetized data onto and pulls packetized data off of the fiber optic loop. Thereby, flows can access the fiber optic loop via the MPS's. The MPS's also regulate the data rates on a per-flow basis according to setup information supplied by a Ring Management System (RMS). If one segment of the fiber loop becomes overly congested, the MPS guarantees quality of service for those flows by deallocating available bandwidth from flows upstream to the point of congestion. Utilization of packet transport ring capacity is optimized by allocating any bandwidth that becomes available to active flows according to a pre-specified weighting scheme.

00000000 24250550

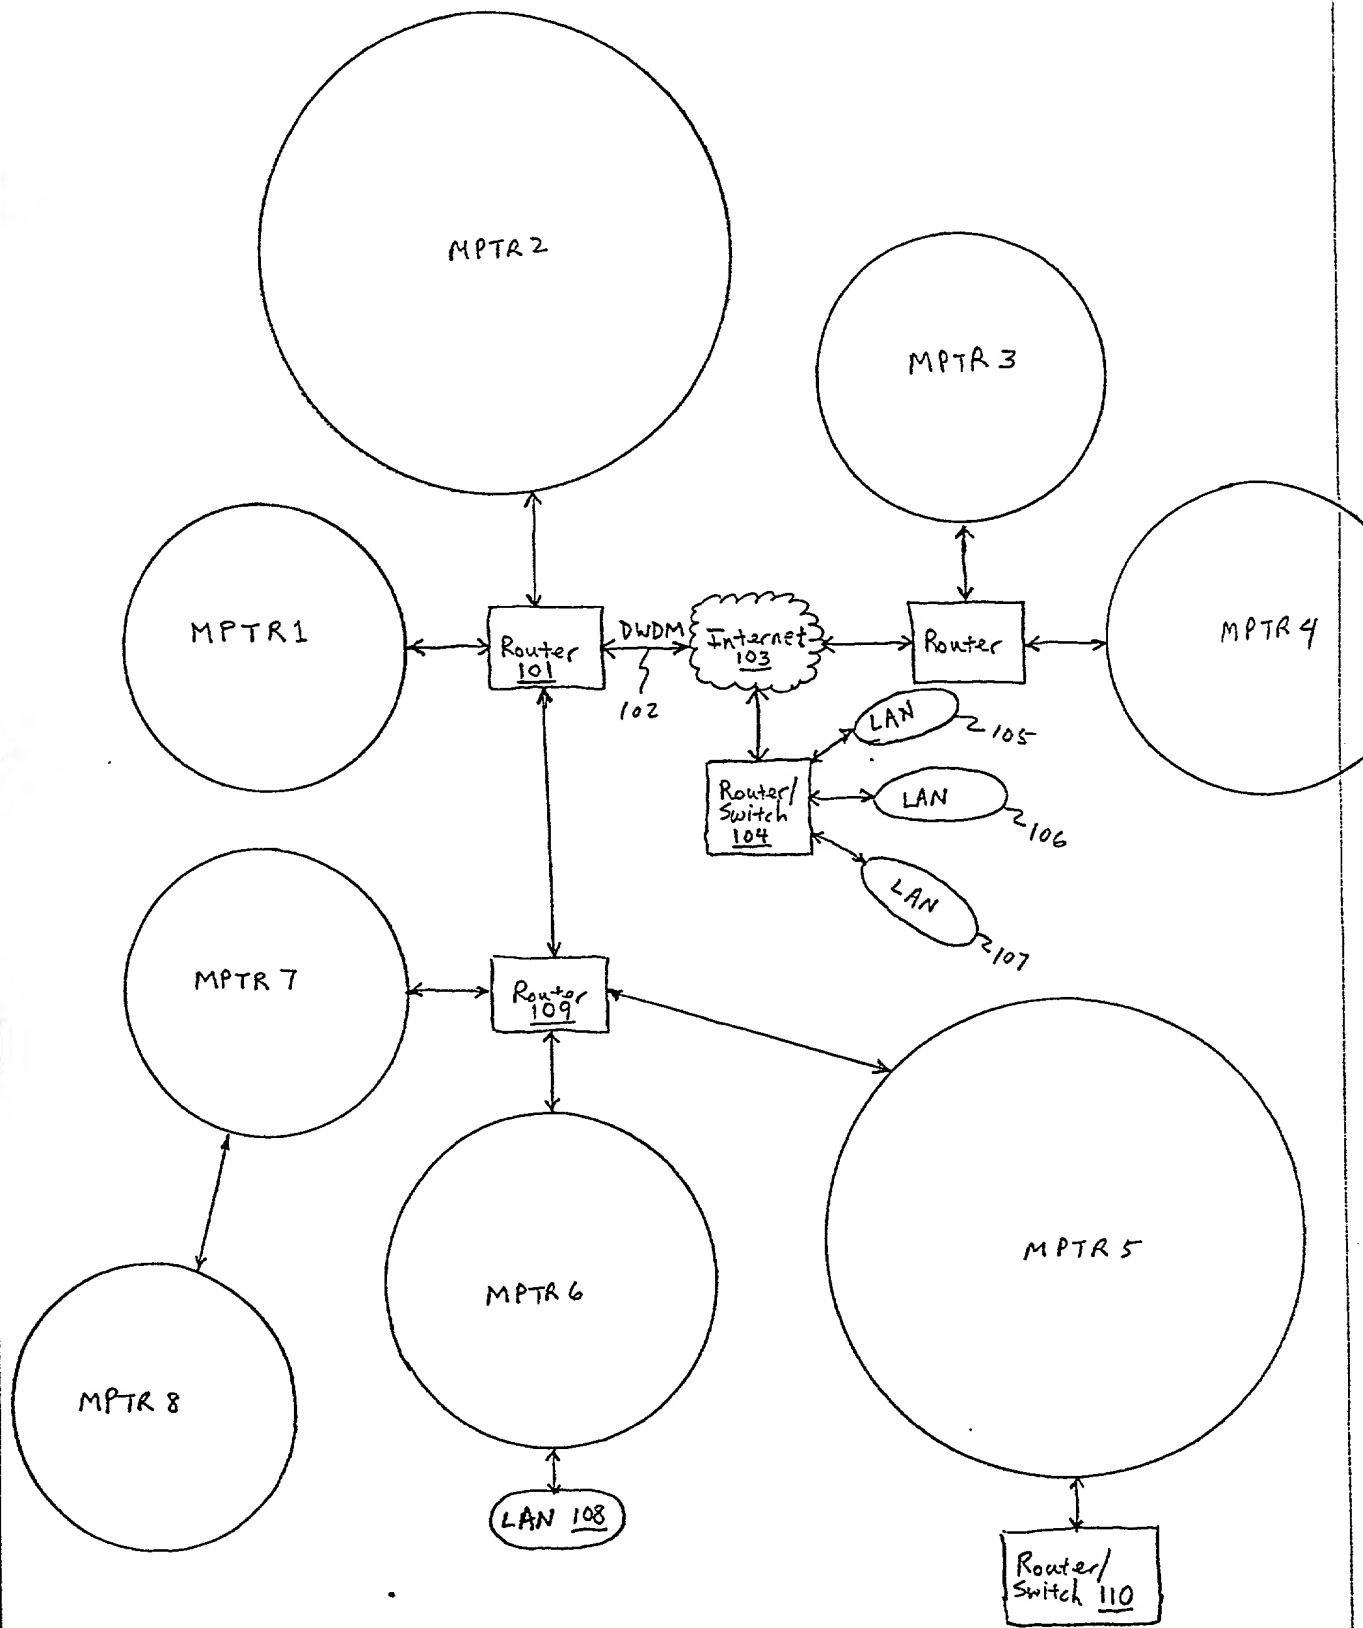


Figure 1

1990-1991 1991-1992 1992-1993 1993-1994 1994-1995 1995-1996 1996-1997 1997-1998 1998-1999 1999-2000 2000-2001 2001-2002 2002-2003 2003-2004 2004-2005 2005-2006 2006-2007 2007-2008 2008-2009 2009-2010 2010-2011 2011-2012 2012-2013 2013-2014 2014-2015 2015-2016 2016-2017 2017-2018 2018-2019 2019-2020 2020-2021 2021-2022 2022-2023 2023-2024 2024-2025 2025-2026 2026-2027 2027-2028 2028-2029 2029-2030 2030-2031 2031-2032 2032-2033 2033-2034 2034-2035 2035-2036 2036-2037 2037-2038 2038-2039 2039-2040 2040-2041 2041-2042 2042-2043 2043-2044 2044-2045 2045-2046 2046-2047 2047-2048 2048-2049 2049-2050 2050-2051 2051-2052 2052-2053 2053-2054 2054-2055 2055-2056 2056-2057 2057-2058 2058-2059 2059-2060 2060-2061 2061-2062 2062-2063 2063-2064 2064-2065 2065-2066 2066-2067 2067-2068 2068-2069 2069-2070 2070-2071 2071-2072 2072-2073 2073-2074 2074-2075 2075-2076 2076-2077 2077-2078 2078-2079 2079-2080 2080-2081 2081-2082 2082-2083 2083-2084 2084-2085 2085-2086 2086-2087 2087-2088 2088-2089 2089-2090 2090-2091 2091-2092 2092-2093 2093-2094 2094-2095 2095-2096 2096-2097 2097-2098 2098-2099 2099-2100 2100-2101 2101-2102 2102-2103 2103-2104 2104-2105 2105-2106 2106-2107 2107-2108 2108-2109 2109-2110 2110-2111 2111-2112 2112-2113 2113-2114 2114-2115 2115-2116 2116-2117 2117-2118 2118-2119 2119-2120 2120-2121 2121-2122 2122-2123 2123-2124 2124-2125 2125-2126 2126-2127 2127-2128 2128-2129 2129-2130 2130-2131 2131-2132 2132-2133 2133-2134 2134-2135 2135-2136 2136-2137 2137-2138 2138-2139 2139-2140 2140-2141 2141-2142 2142-2143 2143-2144 2144-2145 2145-2146 2146-2147 2147-2148 2148-2149 2149-2150 2150-2151 2151-2152 2152-2153 2153-2154 2154-2155 2155-2156 2156-2157 2157-2158 2158-2159 2159-2160 2160-2161 2161-2162 2162-2163 2163-2164 2164-2165 2165-2166 2166-2167 2167-2168 2168-2169 2169-2170 2170-2171 2171-2172 2172-2173 2173-2174 2174-2175 2175-2176 2176-2177 2177-2178 2178-2179 2179-2180 2180-2181 2181-2182 2182-2183 2183-2184 2184-2185 2185-2186 2186-2187 2187-2188 2188-2189 2189-2190 2190-2191 2191-2192 2192-2193 2193-2194 2194-2195 2195-2196 2196-2197 2197-2198 2198-2199 2199-2200 2200-2201 2201-2202 2202-2203 2203-2204 2204-2205 2205-2206 2206-2207 2207-2208 2208-2209 2209-2210 2210-2211 2211-2212 2212-2213 2213-2214 2214-2215 2215-2216 2216-2217 2217-2218 2218-2219 2219-2220 2220-2221 2221-2222 2222-2223 2223-2224 2224-2225 2225-2226 2226-2227 2227-2228 2228-2229 2229-2230 2230-2231 2231-2232 2232-2233 2233-2234 2234-2235 2235-2236 2236-2237 2237-2238 2238-2239 2239-2240 2240-2241 2241-2242 2242-2243 2243-2244 2244-2245 2245-2246 2246-2247 2247-2248 2248-2249 2249-2250 2250-2251 2251-2252 2252-2253 2253-2254 2254-2255 2255-2256 2256-2257 2257-2258 2258-2259 2259-2260 2260-2261 2261-2262 2262-2263 2263-2264 2264-2265 2265-2266 2266-2267 2267-2268 2268-2269 2269-2270 2270-2271 2271-2272 2272-2273 2273-2274 2274-2275 2275-2276 2276-2277 2277-2278 2278-2279 2279-2280 2280-2281 2281-2282 2282-2283 2283-2284 2284-2285 2285-2286 2286-2287 2287-2288 2288-2289 2289-2290 2290-2291 2291-2292 2292-2293 2293-2294 2294-2295 2295-2296 2296-2297 2297-2298 2298-2299 2299-2300 2300-2301 2301-2302 2302-2303 2303-2304 2304-2305 2305-2306 2306-2307 2307-2308 2308-2309 2309-2310 2310-2311 2311-2312 2312-2313 2313-2314 2314-2315 2315-2316 2316-2317 2317-2318 2318-2319 2319-2320 2320-2321 2321-2322 2322-2323 2323-2324 2324-2325 2325-2326 2326-2327 2327-2328 2328-2329 2329-2330 2330-2331 2331-2332 2332-2333 2333-2334 2334-2335 2335-2336 2336-2337 2337-2338 2338-2339 2339-2340 2340-2341 2341-2342 2342-2343 2343-2344 2344-2345 2345-2346 2346-2347 2347-2348 2348-2349 2349-2350 2350-2351 2351-2352 2352-2353 2353-2354 2354-2355 2355-2356 2356-2357 2357-2358 2358-2359 2359-2360 2360-2361 2361-2362 2362-2363 2363-2364 2364-2365 2365-2366 2366-2367 2367-2368 2368-2369 2369-2370 2370-2371 2371-2372 2372-2373 2373-2374 2374-2375 2375-2376 2376-2377 2377-2378 2378-2379 2379-2380 2380-2381 2381-2382 2382-2383 2383-2384 2384-2385 2385-2386 2386-2387 2387-2388 2388-2389 2389-2390 2390-2391 2391-2392 2392-2393 2393-2394 2394-2395 2395-2396 2396-2397 2397-2398 2398-2399 2399

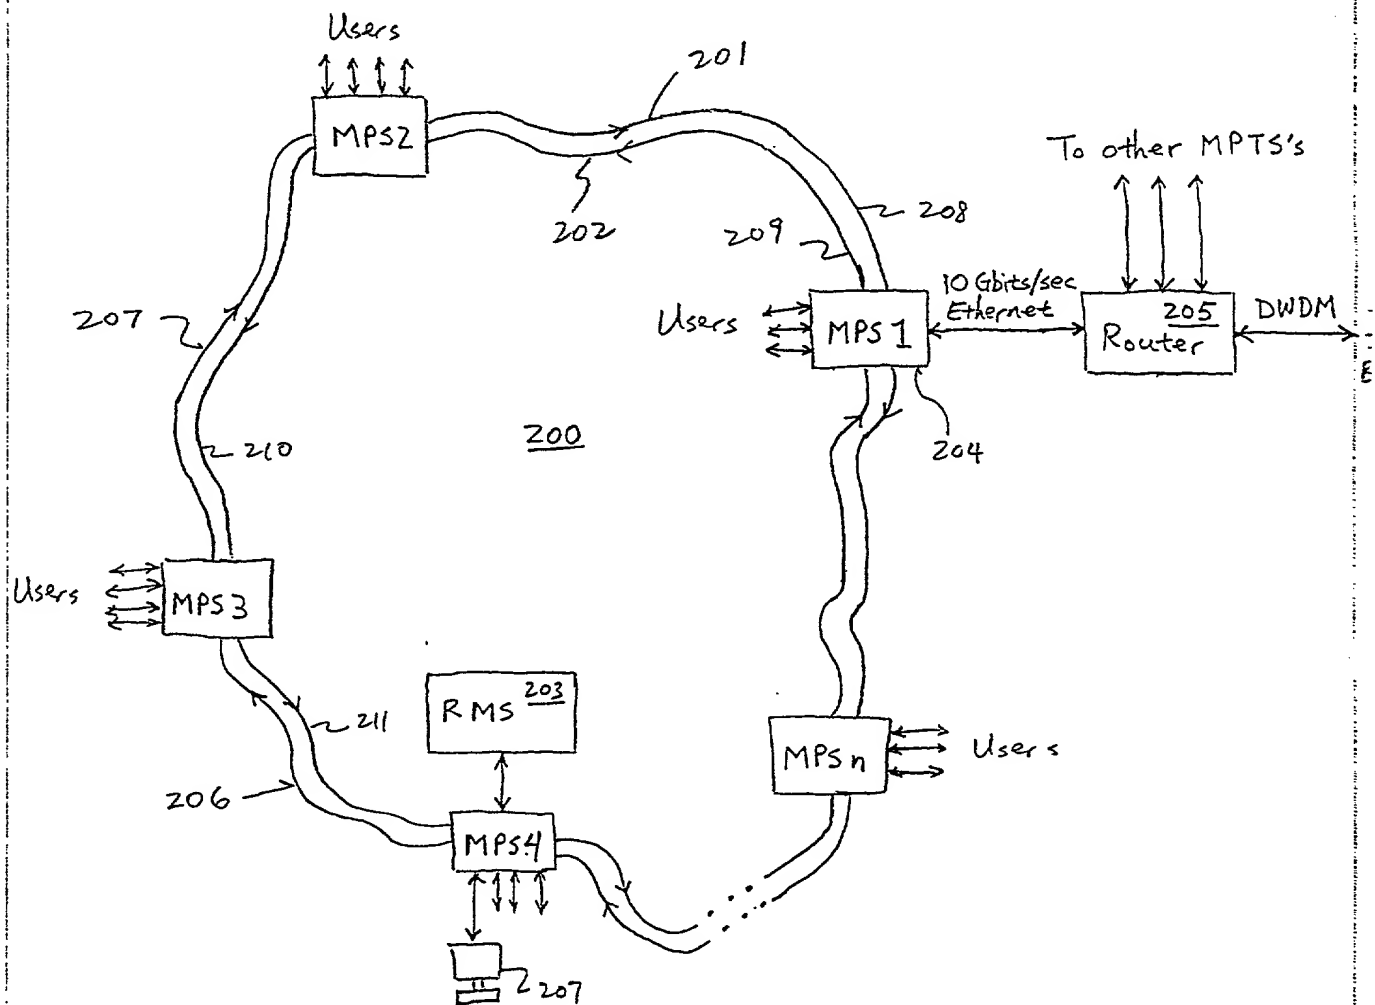


Figure 2

Figure 3



000030 24280960



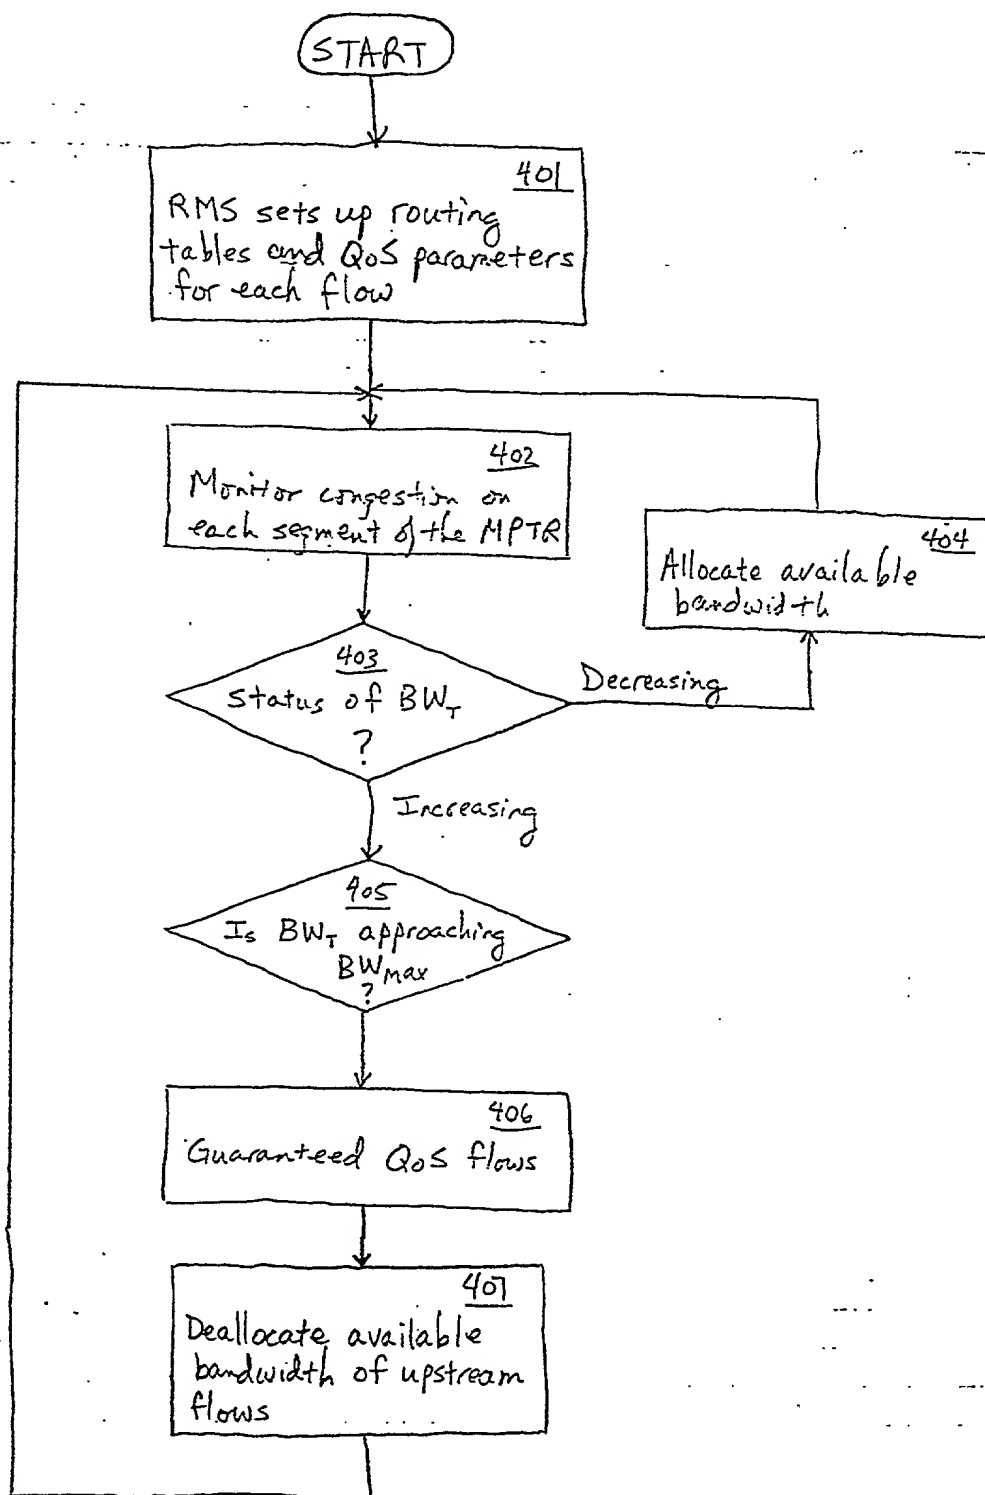


Figure 4

TOPS
65520

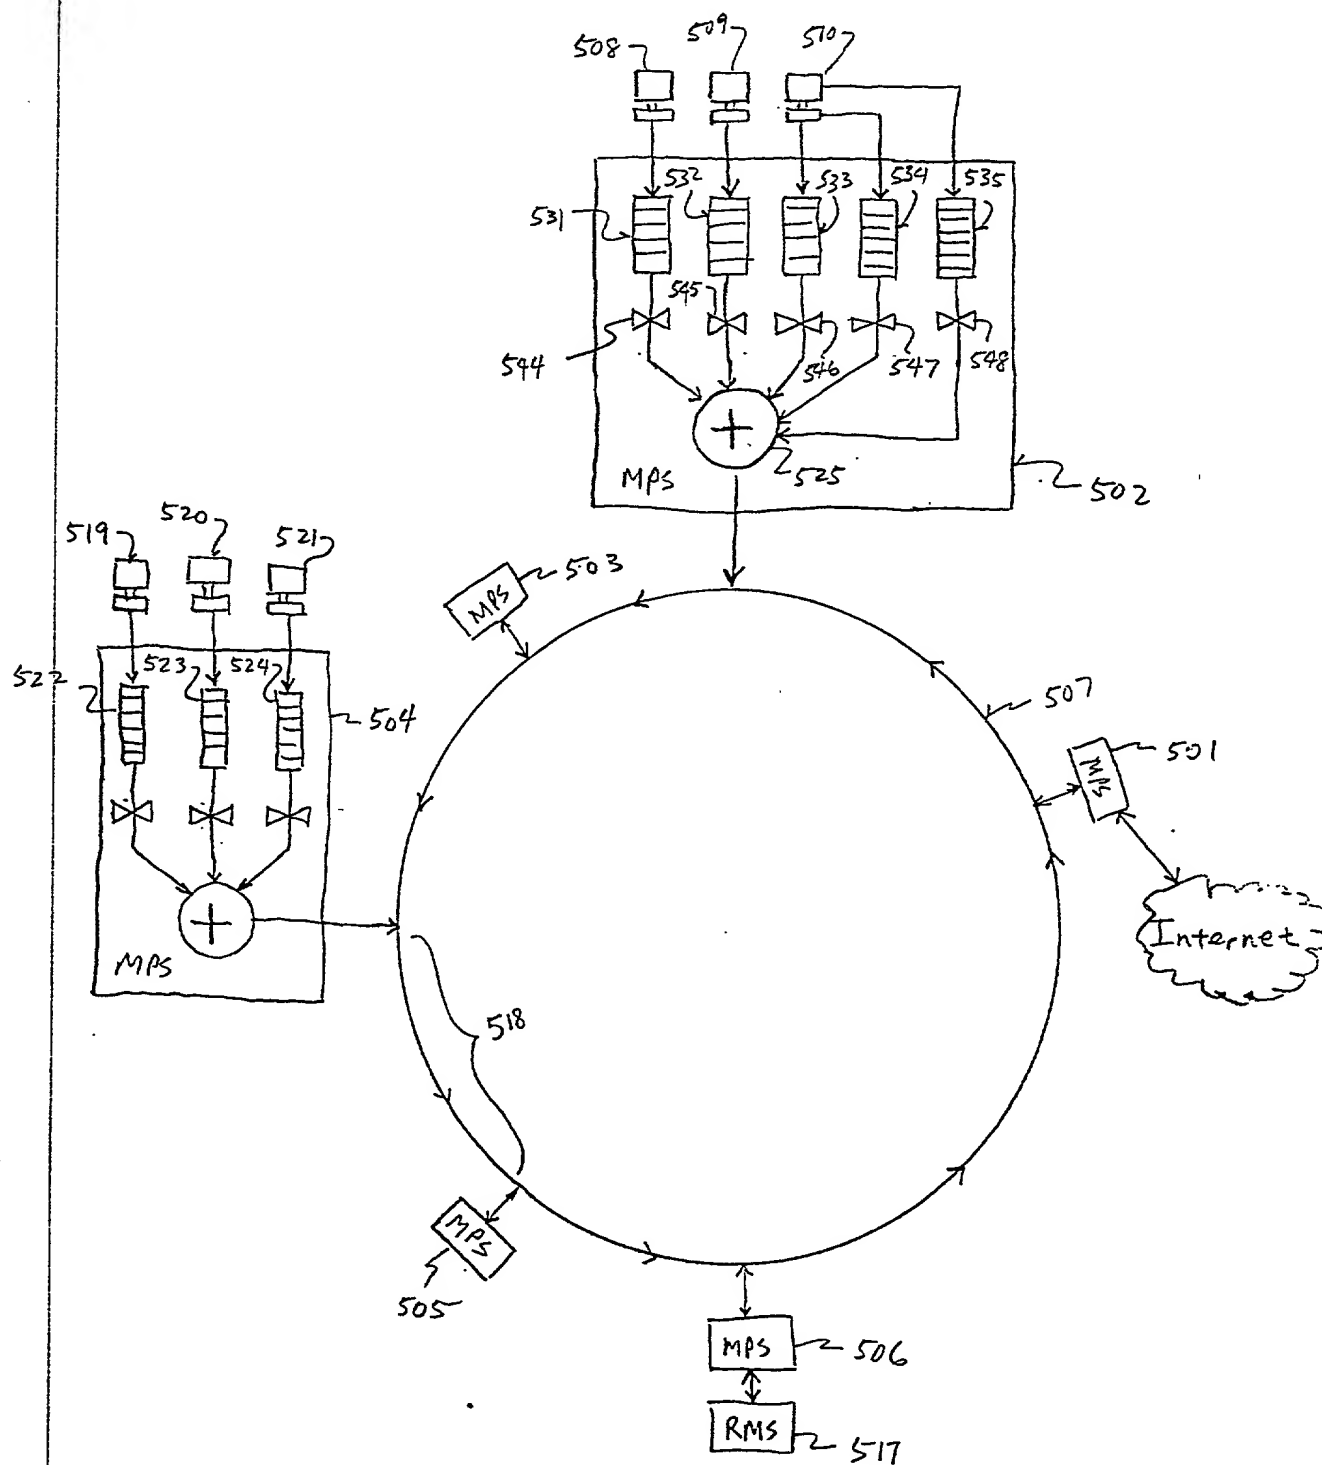

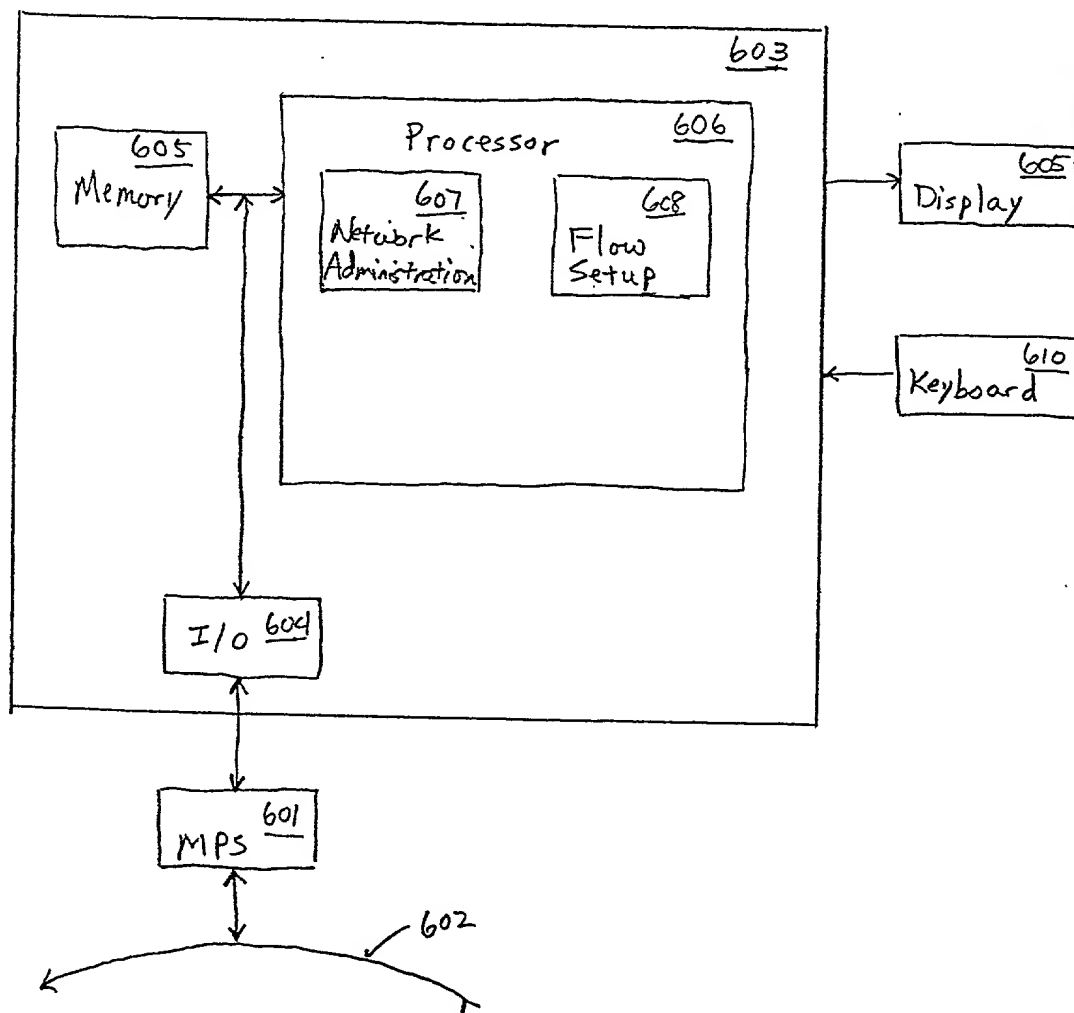

Declaration

GUARANTEED QUALITY OF SERVICE IN AN ASYNCHRONOUS METRO TRANSPORT RING

the specification of which:

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above; and

Foreign Priority Claim

Number	Country	Date Filed	Priority Claimed
.....	yes no
.....	yes no

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Serial Number	Filing Date	Status (patented/pending/abandoned)
.....
.....

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent Trademark Office connected therewith.

Send Correspondence to:

WAGNER, MURABITO & HAO LLP
Two North Market Street
Third Floor
San Jose, California 95113
(408) 938-9060

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Second/Joint Inventor: **Adisak Mekkittikul**

Inventor's Signature Adisak Makkhithikal Date 6/26/2000
Residence Mountain View, California Citizenship Thailand
(City State)
P.O. Address 615 Bryant Avenue, Mountain View, California 94040

Declaration and Power of Attorney for a Patent Application

Declaration

As below named inventor, I hereby declare that my residence post office address, and citizenship are as stated below my name. Further, I hereby declare that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

GUARANTEED QUALITY OF SERVICE IN AN ASYNCHRONOUS METRO TRANSPORT RING
the specification of which:

☒ is attached hereto, or
..... was filed on as application serial no. : and
..... was amended on

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above; and

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

Foreign Priority Claim

I hereby claim foreign priority benefits under Title 35, United States Code Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Number	Country	Date Filed	Priority Claimed
..... yes no
..... yes no

U.S. Priority Claim

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Serial Number	Filing Date	Status (patented/pending/abandoned)
.....
.....

00000000 24230300

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent Trademark Office connected therewith.

Send Correspondence to:

Signatures

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Second/Joint Inventor: **Adisak Mekkitikul**

Inventor's Signature _____ Date _____
 Residence Mountain View, California Citizenship Thailand
 (City State)
 P.O. Address 615 Bryant Avenue, Mountain View, California 94040